

# LIGHTING

PRODUCT CATALOGUE  
01/2015





# INFORMATION ON ACTIVEJET BRAND

## Highest product quality

ActiveJet brand, listed on Warsaw Stock Exchange since 2006, is a property of ACTION S.A. — one of the biggest distributors of computer hardware in Poland, which has been operating on the market for over 20 years.

The report prepared by PART IT Reseller concludes that ActiveJet is a most popular brand of alternative inks and toners in Poland (results of the surveys conducted in 2012-2013). The brand gained its reputation mainly due to the excellent quality of inks and toners and other consumables and office supplies launched by it on the Polish market.

ActiveJet products won many quality tests carried out by independent laboratories and obtained numerous certificates, including GRCI, IPL RIT (Imaging Products Laboratory). The alternative materials for printing equipment offered under ActiveJet brand received quality certificates ISO 9001:2008 and ISO 14001:2004 issued by BSI Group Polska and certificate of conformity M+T issued by TÜV Rheinland Polska.

Meeting the expectations of the market, the product offer was enhanced by new groups: ActiveJet Energy and Accessories. ActiveJet Energy offers both energy saving fluorescent lamps and LED lights — alternative to traditional light source bulbs.

ActiveJet brand has been for years very actively involved in promotion of Polish sport. During the years 2012-2013 the brand was a main sponsor of football club Legia Warsaw.

Since 2014 it is a title sponsor of its own professional cycling team ActiveJet Team.

### The titles awarded to ActiveJet in prestigious competitions for the highest global product quality:

- 2014** – Leader of the Decade, Golden IT ACE, Consumer Quality Leader, Consumer Laurel
- 2013** – Client's Golden Laurel, Top Brand, Golden IT ACE, Student Brand of the Year, 1st place in the test of alternative inks by PC World monthly magazine
- 2012** – Consumer Quality Leader, Client's Golden Laurel, Top Brand, 1st place in the test of alternative inks by PC World monthly magazine, Client's Silver Laurel as a distinction for lighting materials ActiveJet
- 2011** – Client's Golden Laurel, Top Brand, Polish Quality
- 2010** – Client's Golden Laurel
- 2009** – Quality of the Year, Client's Golden Laurel
- 2008** – Quality of the Year
- 2007** – Quality of the Year, Brand Leader





# ENERGY SAVING SOLUTIONS FOR YOUR HOME




- Guaranteed long life - 30 000 h
- warm colour of light
- wide lighting angle
- outdoor and indoor application

**LED**

12W  
75W



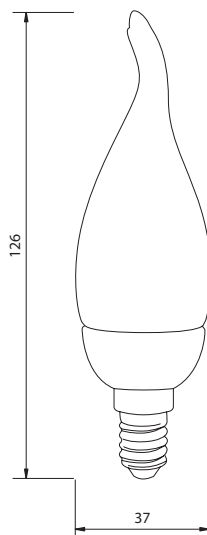

LED SMD

**AJE-DS2014CF**

flame 450lm 5W E14


warm white

Product code	AJE-DS2014CF
Power [W]	5
Light source	LED SMD Lamp - flame
Core	E14
Power supply [V]	230
Number of diodes	27
Light stream [lm]	450
Colour temperature [K]	2700 (+-200)
Lighting angle [°]	120
Declared substitute [W]	40
Life [h]	20000
Energy consumption [kWh/1000h]	5
EAN	5901443015703
Declarations	CE, RoHS
Dimensions width x height [mm]	37 x 126


#### Dedication, specifications

- To be used as main light thanks to high light parameters.
- Option of using inside the premises and in enclosed outdoor fittings thanks to the resistance to low temperatures and frost.
- Decorative shape.



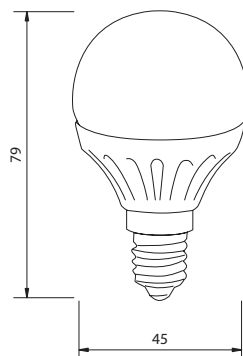

LED SMD


**AJE-DS2014G**MiniGlobe 450lm 5W E14  
warm white

LED SMD

**AJE-DS2027G**MiniGlobe 450lm 5W E27  
warm whiteDedication, specifications

- To be used as main light thanks to high light parameters.
- Option of using inside the premises and in enclosed outdoor fittings thanks to the resistance to low temperatures and frost.

Product code	AJE-DS2014G	AJE-DS2027G
Power [W]	5	5
Light source	LED SMD Lamp - MiniGlobe	LED SMD Lamp - MiniGlobe
Core	E14	E27
Power supply [V]	230	230
Number of diodes	27	27
Light stream [lm]	450	450
Colour temperature [K]	2700 (+-200)	2700 (+-200)
Lighting angle [°]	120	120
Declared substitute [W]	40	40
Life [h]	20000	20000
Energy consumption [kWh/1000h]	5	5
EAN	5901443015727	5901443015710
Declarations	CE, RoHS	CE, RoHS
Dimensions width x height [mm]	45 x 79	45 x 75

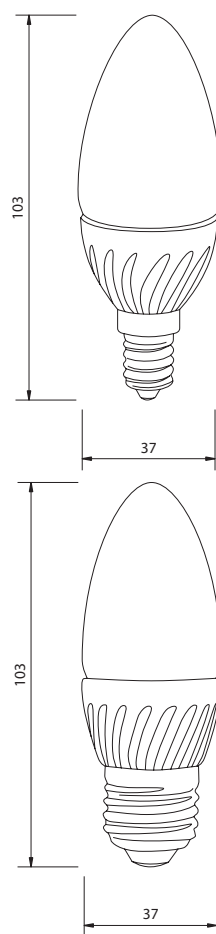

LED SMD

**AJE-DS2014C**

Candle 450lm 5W E14  
warm white

LED SMD

**AJE-DS2027C**


Candle 450lm 5W E27  
warm white

#### Dedication, specifications

- To be used as main light thanks to high light parameters.
- Option of using inside the premises and in enclosed outdoor fittings thanks to the resistance to low temperatures and frost.
- Decorative shape.

Product code	AJE-DS2014C	AJE-DS2027C
Power [W]	5	5
Light source	LED SMD Lamp - Candle	LED SMD Lamp - Candle
Core	E14	E27
Power supply [V]	230	230
Number of diodes	27	27
Light stream [lm]	450	450
Colour temperature [K]	2700 (+-200)	2700 (+-200)
Lighting angle [°]	120	120
Declared substitute [W]	40	40
Life [h]	20000	20000
Energy consumption [kWh/1000h]	5	5
EAN	5901443015680	5901443015697
Declarations	CE, RoHS	CE, RoHS
Dimensions width x height [mm]	37 x 103	37 x 103






LED SMD  
**AJE-S6010W**  
 320lm 4,5W GU10  
 warm white

LED SMD  
**AJE-S6010C**  
 320lm 4,5W GU10  
 cool white

#### Dedication, specifications

- To be used in ceiling mounted spot light fittings
- Option of using inside the premises and in enclosed outdoor fittings thanks to the resistance to low temperatures and frost.

Product code	AJE-S6010W	AJE-S6010C
Power [W]	4,5	4,5
Light source	LED SMD Lamp	LED SMD Lamp
Core	GU10	GU10
Power supply [V]	230	230
Number of diodes	60	60
Light stream [lm]	320	320
Colour temperature [K]	3200 (+-200)	6500 (+-500)
Lighting angle [°]	120	120
Declared substitute [W]	30	30
Life [h]	30000	30000
Energy consumption [kWh/1000h]	4,5	4,5
EAN	5901452155377	5901452155360
Declarations	CE, RoHS	CE, RoHS
Dimensions width x height [mm]	50 x 58	50 x 58

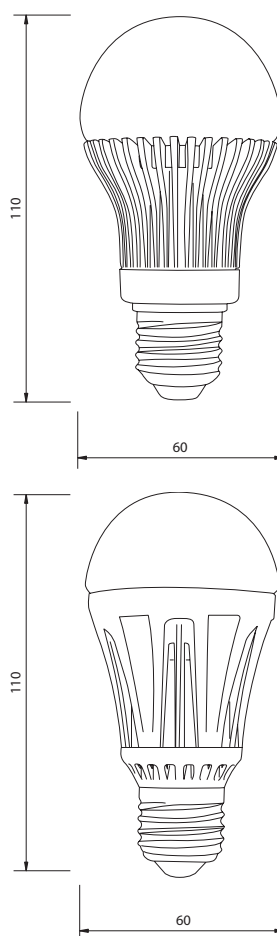

LED SMD  
**AJE-HS2827B**

Globe 806lm 10W E27  
warm white

LED SMD  
**AJE-HS1055W**


Globe 1055lm 12W E27  
warm white

#### Dedication, specifications

- To be used as main light thanks to high light parameters.
- Option of using inside the premises and in enclosed outdoor fittings thanks to the resistance to low temperatures and frost.

Product code	AJE-HS2827B	AJE-HS1055W
Power [W]	10	12
Light source	LED SMD Lamp - Globe A60	LED SMD Lamp - Globe A60
Core	E27	E27
Power supply [V]	230	230
Number of diodes	20	30
Light stream [lm]	806	1055
Colour temperature [K]	2700 (+-200)	2700 (+-200)
Lighting angle [°]	140	120
Declared substitute [W]	60	75
Life [h]	25000	20000
Energy consumption [kWh/1000h]	10	12
EAN	5901443013846	5901443015413
Declarations	CE, RoHS	CE, RoHS
Dimensions width x height [mm]	60 x 110	60 x 110






LED SMD  
**AJE-S6053W**  
 300lm 4W GU5,3  
 warm white

LED SMD  
**AJE-S6053C**  
 300lm 4W GU5,3  
 cool white

#### Dedication, specifications

- To be used in ceiling mounted spot light fittings
- Option of using inside the premises and in enclosed outdoor fittings thanks to the resistance to low temperatures and frost.

Product code	AJE-S6053W ECO	AJE-S6053C ECO
Power [W]	4	4
Light source	LED SMD Lamp	LED SMD Lamp
Core	GU5,3	GU5,3
Power supply [V]	12	12
Number of diodes	60	60
Light stream [lm]	300	300
Colour temperature [K]	3200 (+-200)	6500 (+-500)
Lighting angle [°]	120	120
Declared substitute [W]	30	30
Life [h]	20000	20000
Energy consumption [kWh/1000h]	4	4
EAN	5901443014560	5901443014577
Declarations	CE, RoHS	CE, RoHS
Dimensions width x height [mm]	50 x 49	50 x 49



### LED SMD **AJE-NS2410W**

380lm 5,5W GU10  
warm white

### LED SMD **AJE-NS2410C**


380lm 5,5W GU10  
cool white

#### Dedication, specifications


- To be used in ceiling mounted spot light fittings
- Option of using inside the premises and in enclosed outdoor fittings thanks to the resistance to low temperatures and frost.

Product code	AJE-NS2410W	AJE-NS2410C
Power [W]	5,5	5,5
Light source	LED SMD Lamp	LED SMD Lamp
Core	GU10	GU10
Power supply [V]	230	230
Number of diodes	22	22
Light stream [lm]	380	380
Colour temperature [K]	3200 (+-200)	6500 (+-500)
Lighting angle [°]	120	120
Declared substitute [W]	40	40
Life [h]	30000	30000
Energy consumption [kWh/1000h]	5,5	5,5
EAN	5901443018568	5901443018575
Declarations	CE, RoHS	CE, RoHS
Dimensions width x height [mm]	50 x 56	50 x 56






LED SMD  
**AJE-MC3G9**  
 200lm 2,8W G9  
 warm white



LED SMD  
**AJE-MC4G9**  
 300lm 4W G9  
 warm white




LED SMD  
**AJE-MC1G4**  
 180lm 2,5W G4  
 warm white

#### Dedication, specifications

- Used in various types of light fittings dedicated to provide light inside the premises, mainly in decorative fittings
- Option of using inside the premises and in enclosed outdoor fittings thanks to the resistance to low temperatures and frost.

Product code	AJE-MC3G9	AJE-MC4G9	AJE-MC1G4
Power [W]	2,8	4	2,5
Light source	LED Lamp MCOB	LED Lamp MCOB	LED Lamp MCOB
Core	G9	G9	G4
Power supply [V]	230	230	12
Number of diodes	1	6	4
Light stream [lm]	200	300	180
Colour temperature [K]	2800 (+-200)	3000 (+-200)	3000 (+-200)
Lighting angle [°]	120	200	200
Declared substitute [W]	20	30	20
Life [h]	30000	30000	30000
Energy consumption [kWh/1000h]	2,8	4	2,5
EAN	5901443018605	5901443096276	5901443096283
Declarations	CE, RoHS	CE, RoHS	CE, RoHS
Dimensions width x height [mm]	18 x 62	21 x 51	16 x 41

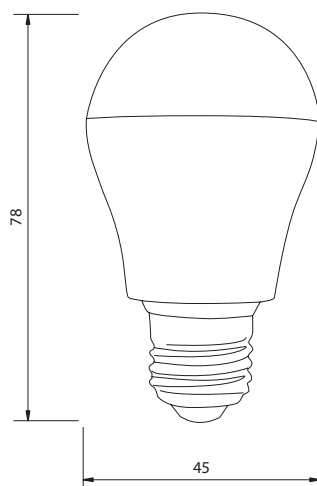


LED SMD  
**AJE-HS600W**  
 600lm 7W E27  
 warm white

Product code	AJE-HS600W
Power [W]	7
Light source	LED SMD Lamp - Globe A60
Core	E27
Power supply [V]	230
Number of diodes	11
Light stream [lm]	600
Colour temperature [K]	2800 (+-200)
Lighting angle [°]	120
Declared substitute [W]	50
Life [h]	30000
Energy consumption [kWh/1000h]	7
EAN	5901443018773
Declarations	CE, RoHS
Dimensions width x height [mm]	60 x 106

#### Dedication, specifications

- To be used as main light thanks to high light parameters.
- Option of using inside the premises and in enclosed outdoor fittings thanks to the resistance to low temperatures and frost.



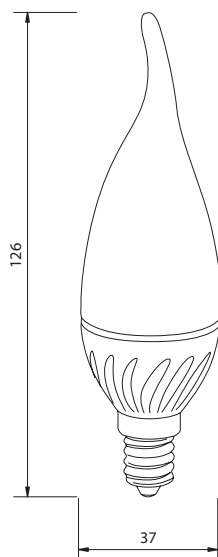

LED SMD

**AJE-DS3014CF-W**

flame 320lm 4W E14

warm white

LED SMD

**AJE-DS3014CF-C**


flame 320lm 4W E14

cool white

#### Dedication, specifications

- To be used as main light thanks to high light parameters.
- Option of using inside the premises and in enclosed outdoor fittings thanks to the resistance to low temperatures and frost.
- Decorative shape.

Product code	AJE-DS3014CF-W	AJE-DS3014CF-C
Power [W]	4	4
Light source	LED SMD Lamp - flame	LED SMD Lamp - flame
Core	E14	E14
Power supply [V]	230	230
Number of diodes	20	20
Light stream [lm]	320	320
Colour temperature [K]	2700 (+-200)	6500 (+-500)
Lighting angle [°]	160	160
Declared substitute [W]	30	30
Life [h]	30000	30000
Energy consumption [kWh/1000h]	4	4
EAN	5901443020875	5901443020882
Declarations	CE, RoHS	CE, RoHS
Dimensions width x height [mm]	37 x 126	37 x 126

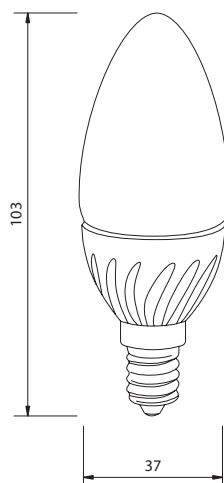


LED SMD  
**AJE-DS3014C-W**  
 candle 320lm 4W E14  
 warm white

LED SMD  
**AJE-DS3014C-C**  
 candle 320lm 4W E14  
 cool white

#### Dedication, specifications

- To be used as main light thanks to high light parameters.
- Option of using inside the premises and in enclosed outdoor fittings thanks to the resistance to low temperatures and frost.
- Decorative shape.

Product code	AJE-DS3014C-W	AJE-DS3014C-C
Power [W]	4	4
Light source	LED SMD Lamp - Candle	LED SMD Lamp - Candle
Core	E14	E14
Power supply [V]	230	230
Number of diodes	20	20
Light stream [lm]	320	320
Colour temperature [K]	2700 (+-200)	6500 (+-500)
Lighting angle [°]	160	160
Declared substitute [W]	30	30
Life [h]	30000	30000
Energy consumption [kWh/1000h]	4	4
EAN	5901443020899	5901443020905
Declarations	CE, RoHS	CE, RoHS
Dimensions width x height [mm]	37 x 103	37 x 103

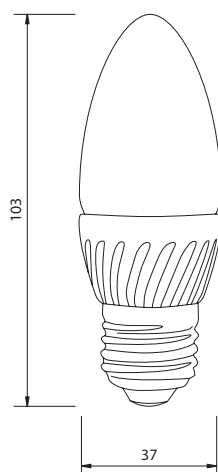


LED SMD  
**AJE-DS3027C-W**  
 candle 320lm 4W E27  
 warm white

LED SMD  
**AJE-DS3027C-C**  
 candle 320lm 4W E27  
 cool white

#### Dedication, specifications

- To be used as main light thanks to high light parameters.
- Option of using inside the premises and in enclosed outdoor fittings thanks to the resistance to low temperatures and frost.
- Decorative shape.

Product code	AJE-DS3027C-W	AJE-DS3027C-C
Power [W]	4	4
Light source	LED SMD Lamp - Candle	LED SMD Lamp - Candle
Core	E27	E27
Power supply [V]	230	230
Number of diodes	20	20
Light stream [lm]	320	320
Colour temperature [K]	2700 (+-200)	6500 (+-500)
Lighting angle [°]	160	160
Declared substitute [W]	30	30
Life [h]	30000	30000
Energy consumption [kWh/1000h]	4	4
EAN	5901443020912	5901443020929
Declarations	CE, RoHS	CE, RoHS
Dimensions width x height [mm]	37 x 103	37 x 103

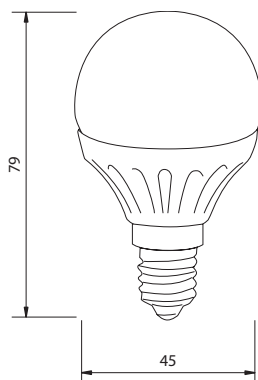

## LED SMD

**AJE-DS3014G-W**

MiniGlobe 320lm 4W E14  
warm white

## LED SMD

**AJE-DS3014G-C**


MiniGlobe 320lm 4W E14  
cool white

Dedication, specifications

- To be used as main light thanks to high light parameters.
- Option of using inside the premises and in enclosed outdoor fittings thanks to the resistance to low temperatures and frost.

Product code	AJE-DS3014G-W	AJE-DS3014G-C
Power [W]	4	4
Light source	LED SMD Lamp - MiniGlobe	LED SMD Lamp - MiniGlobe
Core	E14	E14
Power supply [V]	230	230
Number of diodes	20	20
Light stream [lm]	320	320
Colour temperature [K]	2700 (+-200)	6500 (+-500)
Lighting angle [°]	160	160
Declared substitute [W]	30	30
Life [h]	30000	30000
Energy consumption [kWh/1000h]	4	4
EAN	5901443020936	5901443020943
Declarations	CE, RoHS	CE, RoHS
Dimensions width x height [mm]	45 x 79	45 x 79



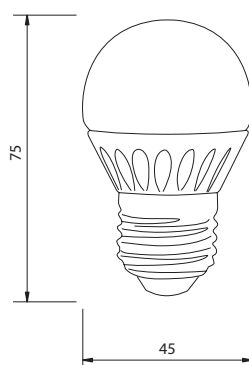

## LED SMD

**AJE-DS3027G-W**

MiniGlobe 320lm 4W E27  
warm white

## LED SMD


**AJE-DS3027G-C**

MiniGlobe 320lm 4W E27  
cool white

### Dedication, specifications

- To be used as main light thanks to high light parameters.
- Option of using inside the premises and in enclosed outdoor fittings thanks to the resistance to low temperatures and frost.

Product code	AJE-DS3027G-W	AJE-DS3027G-C
Power [W]	4	4
Light source	LED SMD Lamp - MiniGlobe	LED SMD Lamp - MiniGlobe
Core	E27	E27
Power supply [V]	230	230
Number of diodes	20	20
Light stream [lm]	320	320
Colour temperature [K]	2700 (+-200)	6500 (+-500)
Lighting angle [°]	160	160
Declared substitute [W]	30	30
Life [h]	30000	30000
Energy consumption [kWh/1000h]	4	4
EAN	5901443020950	5901443020967
Declarations	CE, RoHS	CE, RoHS
Dimensions width x height [mm]	45 x 75	45 x 75




LED SMD  
**AJE-S3210W**  
 470lm 5,8W GU10  
 warm white

LED SMD  
**AJE-S3210C**  
 470lm 5,8W GU10  
 cool white

#### Dedication, specifications

- To be used in ceiling mounted spot light fittings.
- Option of using inside the premises and in enclosed outdoor fittings thanks to the resistance to low temperatures and frost.

Product code	AJE-S3210W	AJE-S3210C
Power [W]	5,8	5,8
Light source	LED SMD Lamp	LED SMD Lamp
Core	GU10	GU10
Power supply [V]	230	230
Number of diodes	32	32
Light stream [lm]	470	470
Colour temperature [K]	3000 (+-200)	6500 (+-500)
Lighting angle [°]	120	120
Declared substitute [W]	40	40
Life [h]	30000	30000
Energy consumption [kWh/1000h]	5,8	5,8
EAN	5901443095675	5901443095682
Declarations	CE, RoHS	CE, RoHS
Dimensions width x height [mm]	50 x 56	50 x 56

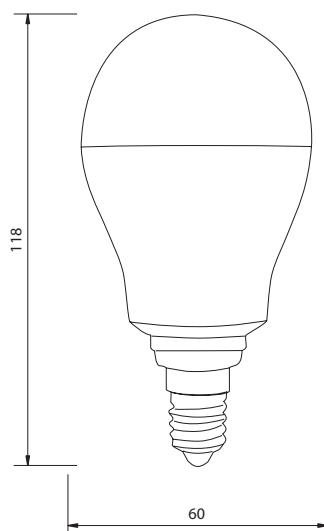

### LED SMD **AJE-HS2814W**

A60 806lm 10W E14  
warm white

### LED SMD **AJE-HS1014W**

A60 1055lm 12W E14  
warm white

#### Dedication, specifications

- To be used as main light thanks to high light parameters.
- Option of using inside the premises and in enclosed outdoor fittings thanks to the resistance to low temperatures and frost.

Product code	AJE-HS2814W	AJE-HS1014W
Power [W]	10	12
Light source	LED SMD Lamp - Globe A60	LED SMD Lamp - Globe A60
Core	E14	E14
Power supply [V]	230	230
Number of diodes	16	30
Light stream [lm]	806	1055
Colour temperature [K]	2700 (+-200)	2700 (+-200)
Lighting angle [°]	120	120
Declared substitute [W]	60	75
Life [h]	30000	30000
Energy consumption [kWh/1000h]	10	12
EAN	5901443097334	5901443097341
Declarations	CE, RoHS	CE, RoHS
Dimensions width x height [mm]	60 x 118	60 x 118



Indoor and outdoor LED strips

Indoor LED strip

**AJE-300L3528WWI**

60LED/m, warm white

Indoor LED strip

**AJE-300L3528WCI**

60LED/m, cool white

Outdoor LED strip

**AJE-Z300L3528WWI**

60LED/m, warm white

Outdoor LED strip

**AJE-Z300L3528WCI**

60LED/m, cool white

## Dedication, specifications

- LED strips are used as a decorative or additional lighting providing a unique character of illuminated places.
- The strips are ideal solution at home to be used as additional lighting of furniture, tops, shelves, niches etc. and to be used outdoors as home decorative lighting.

Product code	AJE-300L3528WWI	AJE-300L3528WCI	AJE-Z300L3528WW	AJE-Z300L3528WC
Power [W]	4,8W/m	4,8W/m	4,8W/m	4,8W/m
Light source	LED SMD			
Core	coupling for the power supply unit included in the set			
Power supply [V]	12V	12V	12V	12V
Number of diodes	60LED/m	60LED/m	60LED/m	60LED/m
Light stream [lm]	160lm/W	160lm/W	160lm/W	160lm/W
Colour temperature [K]	2700-3200	6000-6500	2700-3200	6000-6500
Protection degree	IP20	IP20	IP65	IP65
Lighting angle [°]	120	120	120	120
Energy consumption [kWh/1000h]	24	24	24	24
EAN	5904521236175	5901452124052	5904521236236	5904521236243
Declarations	CE, RoHS	CE, RoHS	CE, RoHS	CE, RoHS





Indoor and outdoor LED RGB strips

Indoor LED RGB strip  
**AJE-150L5050RGB**  
 30LED/m 4,9W/m

Outdoor LED RGB strip  
**AJE-Z150L5050RGB**  
 30LED/m 4,9W/m

#### Dedication, specifications

- LED strips are used as a decorative or additional lighting providing a unique character of illuminated places.
- The strips are ideal solution at home to be used as additional lighting of furniture, tops, shelves, niches etc.

Product code	AJE-150L5050RGB	AJE-Z150L5050RG
Power [W]	7,2W/m	7,2W/m
Light source	LED SMD	
Core	coupling for the power supply unit included in the set	
Power supply [V]	12V	12V
Number of diodes	30LED/m	30LED/m
Protection degree	IP20	IP65
Lighting angle [°]	120	120
Energy consumption [kWh/1000h]	36	36
EAN	5904521236458	5901452156411
Declarations	CE, RoHS	CE, RoHS



LED 3m STRIP  
+ power supply unit  
**AJE-180L3528WWI**  
- warm indoor light

LED 3m STRIP  
+ power supply unit  
**AJE-180L3528WCI**  
- cool indoor light

LED 3m STRIP  
+ power supply unit  
**AJE-Z180L3528WWI**  
- warm outdoor light

LED 3m STRIP  
+ power supply unit  
**AJE-Z180L3528WCI**  
- cool outdoor light

## Dedication, specifications

- LED strips are used as a decorative or additional lighting providing a unique character of illuminated places.
- The strips are ideal solution at home to be used as additional lighting of furniture, tops, shelves, niches etc.

Product code	AJE-180L3528WWI	AJE-180L3528WCI	AJE-Z180L3528WWI	AJE-Z180L3528WCI
Power [W]	4,8W/m	4,8W/m	4,8W/m	4,8W/m
Light source	LED SMD			
Power supply [V]	12V	12V	12V	12V
Number of diodes	60LED/m	60LED/m	60LED/m	60LED/m
Light stream [lm]	160lm/W	160lm/W	160lm/W	160lm/W
Colour temperature [K]	2700-3200	6000-6500	2700-3200	6000-6500
Protection degree	IP20	IP20	IP63	IP63
Lighting angle [°]	120	120	120	120
Energy consumption [kWh/1000h]	14,4	14,4	14,4	14,4
EAN	5901443017127	5901443017110	5901443017141	5901443017134
Declarations	CE, RoHS	CE, RoHS	CE, RoHS	CE, RoHS



Set of 3 ceiling fittings GU10 LED

Satin/nickel SN

**AJE-CELGU10-SN**

Chrome CH

**AJE-CELGU10-CH**

Gold Patina GAB

**AJE-CELGU10-GAB**

#### Dedication, specifications

- Complete set of 3 ceiling fittings including 3 LED bulbs, GU10 fittings and necessary mounting accessories.

Product code	AJE-CELGU10-SN	AJE-CELGU10-CH	AJE-CELGU10-GAB
Power [W]	3 x 3,2	3 x 3,2	3 x 3,2
Light source	LED SMD Lamp	LED SMD Lamp	LED SMD Lamp
Core	GU10	GU10	GU10
Power supply [V]	230	230	230
Number of diodes	17	17	17
Light stream [lm]	250	250	250
Colour temperature [K]	3200	3200	3200
Protection degree	IP20	IP20	IP20
Lighting angle [°]	120	120	120
Declared substitute [W]	25	25	25
Life [h]	30000	30000	30000
Energy consumption [kWh/1000h]	3,2	3,2	3,2
Accessories	3 pcs.	4 pcs.	5 pcs.
	ceramic fittings GU10 including the holder and mounting accessories		
EAN	5901443096733	5901443096740	5901443096757
Declarations	CE, RoHS	CE, RoHS	CE, RoHS



Desk lamp LED

**AJE-DOMI Green**

colour green

**AJE-DOMI-Pink**

colour pink

**AJE-DOMI-Blue**

colour blue

**AJE-DOMI White**

colour white

**AJE-DOMI Grey**

colour grey

#### Dedication, specifications

- Desk lamp mounted with a clip to the desk or table top.
- Movable flexible arm allows to direct the light stream in any direction.
- Available colours: pink, blue, green, grey, white.

Product code	AJE-DOMI Green	AJE-DOMI-Pink	AJE-DOMI-Blue	AJE-DOMI White	AJE-DOMI Grey
Power [W]	5	5	5	5	5
Light source	LED SMD Lamp				
Power supply [V]	230	230	230	230	230
Light stream [lm]	140	140	140	140	140
Colour temperature [K]	5500-6000	5500-6000	5500-6000	5500-6000	5500-6000
Colour rendering index [Ra]	>80	>80	>80	>80	>80
Life [h]	30000	30000	30000	30000	30000
Energy consumption [kWh/1000h]	5	5	5	5	5
Accessories	DC 5V/1A power supply unit included in a set				
EAN	5901443018865	5901443018735	5901443018872	5901443096375	5901443096368
Declarations	CE, RoHS	CE, RoHS	CE, RoHS	CE, RoHS	CE, RoHS





Desk lamp LED RGB  
**AJE-RAINBOW RGB**



Product code	AJE-RAINBOW RGB
Power [W]	6
Light source	LED SMD RGB Lamp
Power supply [V]	230
Ilość diód	34
Light stream [lm]	230
Colour temperature [K]	5000-5500
Colour rendering index [Ra]	>80
Life [h]	35000
Energy consumption [kWh/1000h]	6
Accessories	DC 5V/1A power supply unit included in a set
EAN	5901443097907
Declarations	CE, RoHS

#### Dedication, specifications

- Desk lamp with attractive base (ball) colour changing effect – RGB.
- Movable flexible arm allows to direct the light stream in any direction.

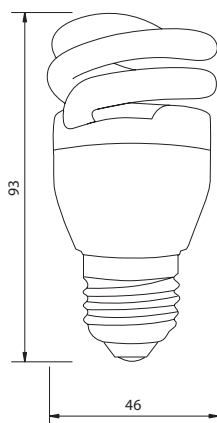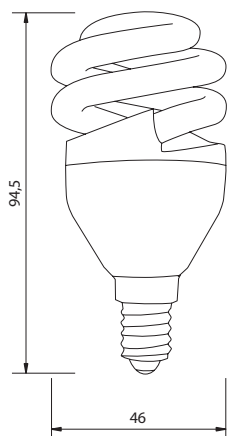


Fluorescent lamp  
**AJE-SF8SE14P**  
E14/8W

Fluorescent lamp  
**AJE-SF8P**  
E27/8W


## Dedication, specifications

- To be used in general and decorative lighting.
- The compact design allows its application in decorative fittings.

Product code	AJE-SF8SE14P	AJE-SF8P
Power [W]	8	8
Light source	Spiral	Spiral
Core	E14	E27
Power supply [V]	230	230
Light stream [lm]	500	500
Colour temperature [K]	2700	2700
Colour rendering index [Ra]	>80	>80
Lighting angle [°]	omnidirectional	omnidirectional
Declared substitute [W]	40	40
Life [h]	10000	10000
Energy consumption [kWh/1000h]	8	8
EAN	5901443095910	5901443095927
Net weight [g]	20	25
Bulk packaging	100	100
Declarations	CE, RoHS	CE, RoHS

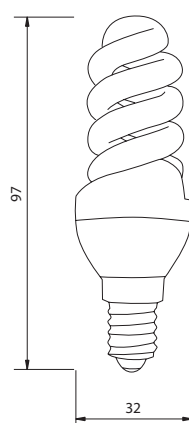

Fluorescent lamp  
**AJE-S9SE14P**  
E14/9W

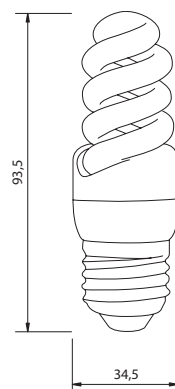


Fluorescent lamp  
**AJE-S9SP**  
E27/9W


#### Dedication, specifications

- To be used in general and decorative lighting.
- The compact design allows its application in decorative fittings.

Product code	AJE-S9SE14P	AJE-S9SP
Power [W]	9	9
Light source	Spiral	Spiral
Core	E14	E27
Power supply [V]	230	230
Light stream [lm]	430	430
Colour temperature [K]	2700	2700
Colour rendering index [Ra]	>80	>80
Lighting angle [°]	omnidirectional	omnidirectional
Declared substitute [W]	45	45
Life [h]	10000	10000
Energy consumption [kWh/1000h]	9	9
EAN	5901452129248	5901452156626
Net weight [g]	25	30
Bulk packaging	100	100
Declarations	CE, RoHS	CE, RoHS

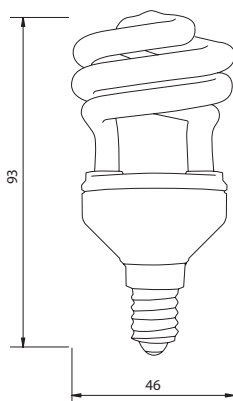

Fluorescent lamp  
**AJE-S11E14P**  
 E14/11W

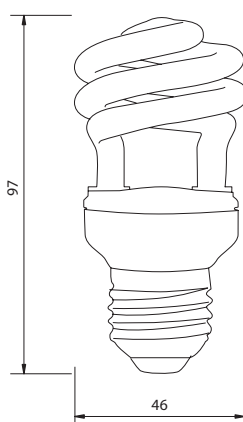


Fluorescent lamp  
**AJE-S11P**  
 E27/11W


#### Dedication, specifications

- To be used in general and decorative lighting.
- The compact design allows its application in decorative fittings.

Product code	AJE-S11E14P	AJE-S11P
Power [W]	11	11
Light source	Spiral	Spiral
Core	E14	E27
Power supply [V]	230	230
Light stream [lm]	630	630
Colour temperature [K]	2700	2700
Colour rendering index [Ra]	>80	>80
Lighting angle [°]	omnidirectional	omnidirectional
Declared substitute [W]	50	50
Life [h]	12000	12000
Energy consumption [kWh/1000h]	11	11
EAN	5901452155315	5901452129385
Net weight [g]	35	38
Bulk packaging	50	50
Declarations	CE, RoHS	CE, RoHS

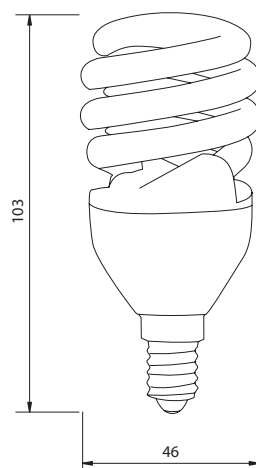

Fluorescent lamp  
**AJE-SF12SE14P**  
E14/12W

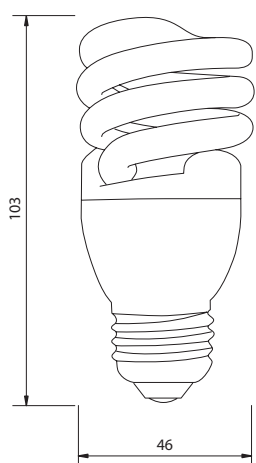



Fluorescent lamp  
**AJE-SF12P**  
E27/12W

#### Dedication, specifications

- To be used in general and decorative lighting.
- The compact design allows its application in decorative fittings.

Product code	AJE-SF12SE14P	AJE-SF12P
Power [W]	12	12
Light source	Spiral	Spiral
Core	E14	E27
Power supply [V]	230	230
Light stream [lm]	741	741
Colour temperature [K]	2700	2700
Colour rendering index [Ra]	>80	>80
Lighting angle [°]	omnidirectional	omnidirectional
Declared substitute [W]	60	60
Life [h]	10000	10000
Energy consumption [kWh/1000h]	12	12
EAN	5901443095934	5901443095941
Net weight [g]	36	39
Bulk packaging	40	40
Declarations	CE, RoHS	CE, RoHS



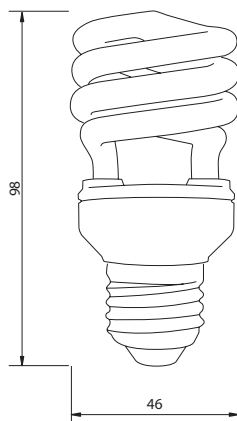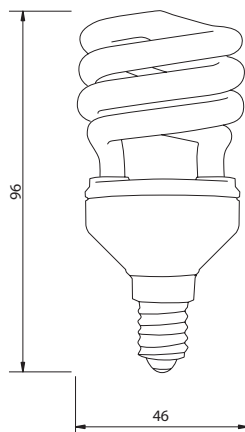



Fluorescent lamp  
**AJE-S13E14P**  
E14/13W

Fluorescent lamp  
**AJE-S13P**  
E27/13W

#### Dedication, specifications

- To be used in general and decorative lighting.
- The compact design allows its application in decorative fittings.

Product code	AJE-S13E14P	AJE-S13P
Power [W]	13	13
Light source	Spiral	Spiral
Core	E14	E27
Power supply [V]	230	230
Light stream [lm]	820	820
Colour temperature [K]	2700	2700
Colour rendering index [Ra]	>80	>80
Lighting angle [°]	omnidirectional	omnidirectional
Declared substitute [W]	65	65
Life [h]	12000	12000
Energy consumption [kWh/1000h]	13	13
EAN	5901452155308	5901452156633
Net weight [g]	39	42
Bulk packaging	50	50
Declarations	CE, RoHS	CE, RoHS

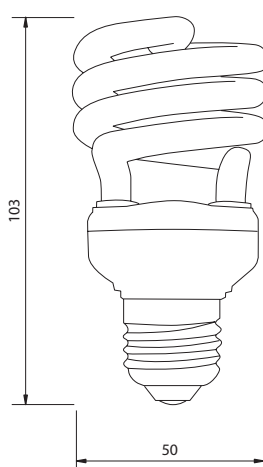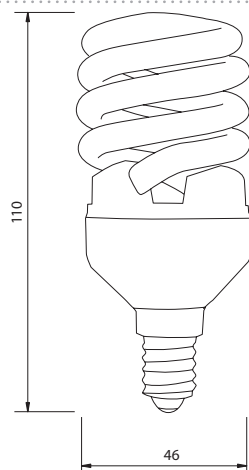


Fluorescent lamp  
**AJE-SF15E14P**  
 E14/15W

Fluorescent lamp  
**AJE-S15P**  
 E27/15W

#### Dedication, specifications

- To be used in general and decorative lighting.
- The compact design allows its application in decorative fittings.

Product code	AJE-SF15E14P	AJE-S15P
Power [W]	15	15
Light source	Spiral	Spiral
Core	E14	E27
Power supply [V]	230	230
Light stream [lm]	845	845
Colour temperature [K]	2700	2700
Colour rendering index [Ra]	>80	>80
Lighting angle [°]	omnidirectional	omnidirectional
Declared substitute [W]	67	67
Life [h]	10000	10000
Energy consumption [kWh/1000h]	15	15
EAN	5901452158699	5901452129392
Net weight [g]	50	55
Bulk packaging	20	50
Declarations	CE, RoHS	CE, RoHS

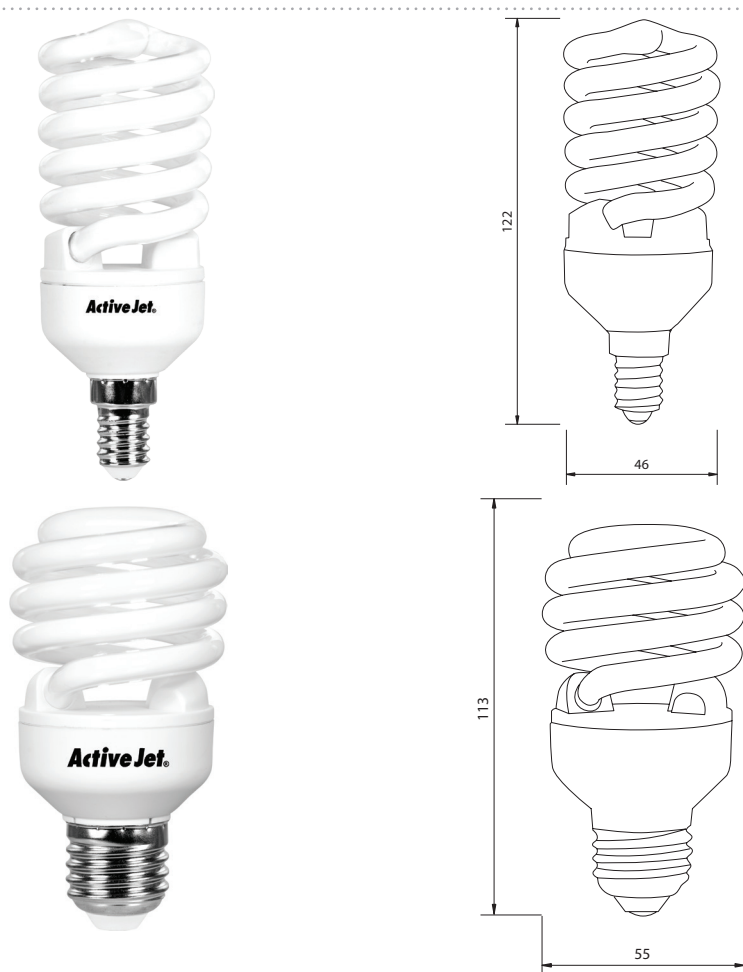


Fluorescent lamp  
**AJE-SF20E14P**  
 E14/20W

Fluorescent lamp  
**AJE-SF20P**  
 E27/20W

#### Dedication, specifications

- To be used in general and decorative lighting.
- The compact design allows its application in decorative fittings.

Product code	AJE-SF20E14P	AJE-SF20P
Power [W]	20	20
Light source	Spiral	Spiral
Core	E14	E27
Power supply [V]	230	230
Light stream [lm]	1200	1200
Colour temperature [K]	2700	2700
Colour rendering index [Ra]	>80	>80
Lighting angle [°]	omnidirectional	omnidirectional
Declared substitute [W]	100	100
Life [h]	10000	10000
Energy consumption [kWh/1000h]	20	20
EAN	5901452158705	5901452129408
Net weight [g]	57	60
Bulk packaging	50	50
Declarations	CE, RoHS	CE, RoHS

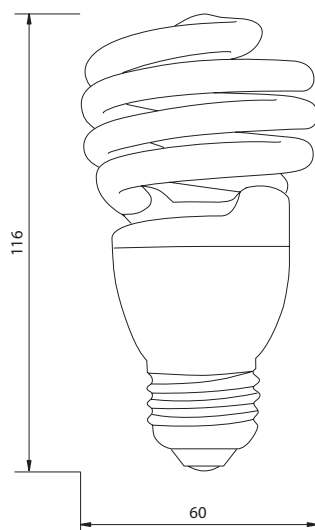

Fluorescent lamp


**AJE-S24P**

E27/24W

Product code	AJE-S24P
Power [W]	24
Light source	Spiral
Core	E27
Power supply [V]	230
Light stream [lm]	1371
Colour temperature [K]	2700
Colour rendering index [Ra]	>80
Lighting angle [°]	omnidirectional
Declared substitute [W]	115
Life [h]	10000
Energy consumption [kWh/1000h]	24
EAN	5901452129415
Net weight [g]	70
Bulk packaging	50
Declarations	CE, RoHS

#### Dedication, specifications

- To be used in general and decorative lighting.
- The compact design allows its application in decorative fittings.

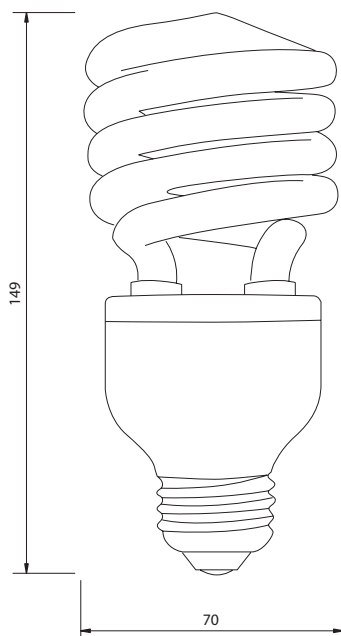


Fluorescent lamp  
**AJE-S32P**  
 E27/32W

Product code	AJE-S32P
Power [W]	32
Light source	Spiral
Core	E27
Power supply [V]	230
Light stream [lm]	2150
Colour temperature [K]	2700
Colour rendering index [Ra]	>80
Lighting angle [°]	omnidirectional
Declared substitute [W]	144
Life [h]	10000
Energy consumption [kWh/1000h]	32
EAN	5901452158712
Net weight [g]	126,8
Bulk packaging	40
Declarations	CE, RoHS

#### Dedication, specifications

- To be used in general and decorative lighting.
- The compact design allows its application in decorative fittings.

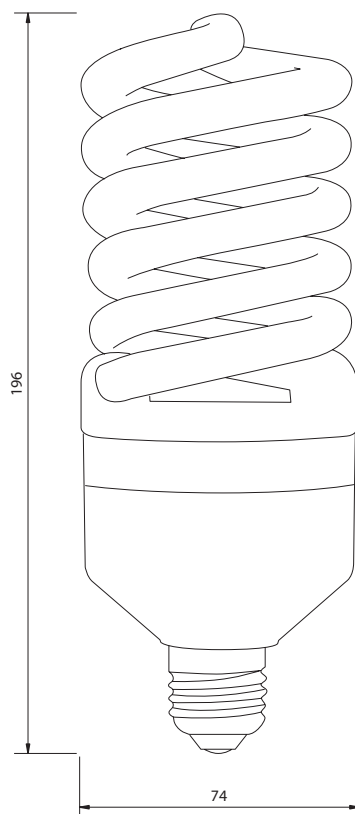

Fluorescent lamp

**AJE-S45P**


E27/45W

Product code	AJE-S45P
Power [W]	45
Light source	Spiral
Core	E27
Power supply [V]	230
Light stream [lm]	3100
Colour temperature [K]	2700
Colour rendering index [Ra]	>80
Lighting angle [°]	omnidirectional
Declared substitute [W]	195
Life [h]	10000
Energy consumption [kWh/1000h]	45
EAN	5901452155056
Net weight [g]	300
Bulk packaging	20
Declarations	CE, RoHS

#### Dedication, specifications

- To be used in general and decorative lighting.
- The compact design allows its application in decorative fittings.



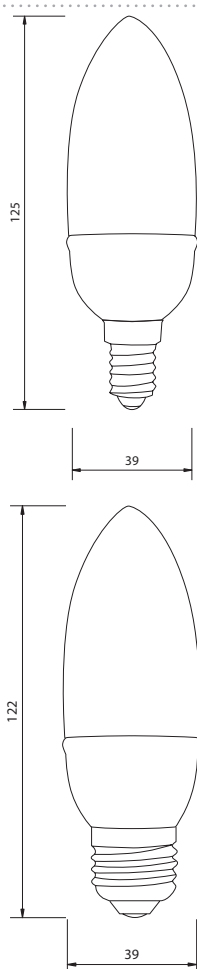


Fluorescent lamp  
**AJE-C9E14P**  
 E14/9W

Fluorescent lamp  
**AJE-C9P**  
 E27/9W


#### Dedication, specifications

- To be used in general and decorative lighting.
- The compact design allows its application in decorative fittings.

Product code	AJE-C9E14P	AJE-C9P
Power [W]	9	9
Light source	Spiral - candle	Spiral - candle
Core	E14	E27
Power supply [V]	230	230
Light stream [lm]	432	432
Colour temperature [K]	2700	2700
Colour rendering index [Ra]	>80	>80
Lighting angle [°]	omnidirectional	omnidirectional
Declared substitute [W]	45	45
Life [h]	10000	10000
Energy consumption [kWh/1000h]	9	9
EAN	5901452129231	5901452129378
Net weight [g]	42	42
Bulk packaging	50	50
Declarations	CE, RoHS	CE, RoHS

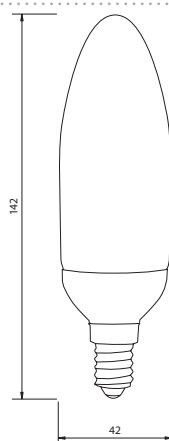

Fluorescent lamp  
**AJE-C13E14P**  
E14/13W

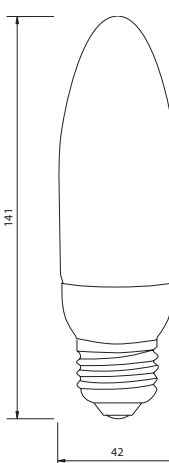


Fluorescent lamp  
**AJE-C13P**  
E27/13W


#### Dedication, specifications

- To be used in general and decorative lighting.
- The compact design allows its application in decorative fittings.

Product code	AJE-C13E14P	AJE-C13P
Power [W]	13	13
Light source	Spiral - candle	Spiral - candle
Core	E14	E27
Power supply [V]	230	230
Light stream [lm]	664	664
Colour temperature [K]	2700	2700
Colour rendering index [Ra]	>80	>80
Lighting angle [°]	omnidirectional	omnidirectional
Declared substitute [W]	55	55
Life [h]	10000	10000
Energy consumption [kWh/1000h]	13	13
EAN	5901443018186	5901443018193
Net weight [g]	57	57
Bulk packaging	50	50
Declarations	CE, RoHS	CE, RoHS

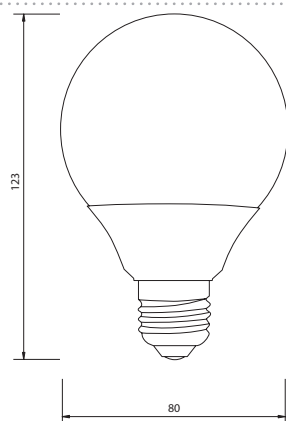

Fluorescent lamp  
**AJE-G15P**  
 E27/15W



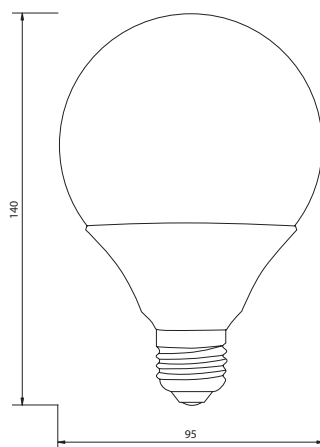


Fluorescent lamp  
**AJE-G20P**  
 E27/20W

#### Dedication, specifications

- To be used in general and decorative lighting.
- The compact design allows its application in decorative fittings.

Product code	AJE-G15P	AJE-G20P
Power [W]	15	20
Light source	Spiral - globe	Spiral - globe
Core	E27	E27
Power supply [V]	230	230
Light stream [lm]	800	1152
Colour temperature [K]	2700	2700
Colour rendering index [Ra]	>80	>80
Lighting angle [°]	omnidirectional	omnidirectional
Declared substitute [W]	75	85
Life [h]	10000	10000
Energy consumption [kWh/1000h]	15	20
EAN	5901452129439	5904521236144
Net weight [g]	87	141
Bulk packaging	20	20
Declarations	CE, RoHS	CE, RoHS



## HALOGEN BULB **AJE-H20G4**

## HALOGEN BULB **AJE-H42G9F**


## HALOGEN FILAMENT **AJE-H400R7S**

Halogen lamp has the option of regulating the light stream (work with the dimmer).

### Dedication, specifications


- To be used in general and decorative lighting.
- AJE-H400R7S to be used in halogen flood-lights.

Product code	AJE-H20G4	AJE-H42G9F	AJE-H400R7S
Power [W]	20	42	400
Light source	Halogen bulb	Halogen bulb	Halogen filament
Core	G4	G9	Rx7s
Power supply [V]	12	230	230
Light stream [lm]	240	625	8550
Colour temperature [K]	4000	4000	4000
Colour rendering index [Ra]	100	100	100
Lighting angle [°]	omnidirectional	omnidirectional	omnidirectional
Declared substitute [W]	25	60	500
Life [h]	2000	1000	1000
Energy consumption [kWh/1000h]	20	42	400
EAN	5901452128845	5901452156206	5901452129125
Net weight [g]	5	9	15
Bulk packaging	100	100	100
Declarations	CE, RoHS	CE, RoHS	CE, RoHS



## HALOGEN BULB **AJE-H3510A**

## HALOGEN BULB **AJE-H5010A**




Halogen lamp has the option of regulating the light stream (work with the dimmer).

### Dedication, specifications

- To be used in general and decorative lighting.

Product code	AJE-H3510A	AJE-H5010A
Power [W]	35	50
Light source	Floodlight	Floodlight
Core	GU10	GU10
Power supply [V]	230	230
Colour temperature [K]	4000	4000
Colour rendering index [Ra]	100	100
Lighting angle [°]	38	38
Declared substitute [W]	35	50
Life [h]	2000	2000
Energy consumption [kWh/1000h]	35	50
EAN	5901452158118	5901452158125
Net weight [g]	41	41
Bulk packaging	100	100
Declarations	CE, RoHS	CE, RoHS

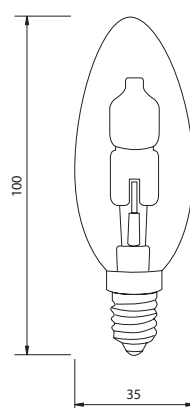

HALOGEN BULB  
**AJE-H2814C**

HALOGEN BULB  
**AJE-H4214C**


Halogen lamp has the option of regulating the light stream (work with the dimmer).

Dedication, specifications

- To be used in general and decorative lighting.

Product code	AJE-H2814C	AJE-H4214C
Power [W]	28	42
Light source	HALOGEN BULB - candle	
Core	E14	E14
Power supply [V]	230	230
Light stream [lm]	370	625
Colour temperature [K]	4000	4000
Colour rendering index [Ra]	100	100
Lighting angle [°]	omnidirectional	omnidirectional
Declared substitute [W]	40	60
Life [h]	1000	1000
Energy consumption [kWh/1000h]	28	42
EAN	5901452129064	5901452129088
Net weight [g]	14	14
Bulk packaging	50	50
Declarations	CE, RoHS	CE, RoHS



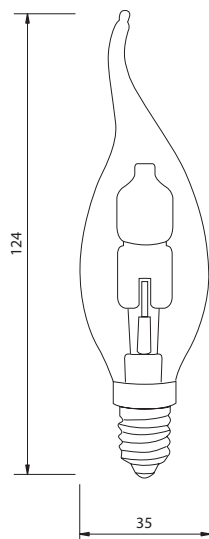


## HALOGEN BULB **AJE-H4214P**

Halogen lamp has the option of regulating the light stream (work with the dimmer).


Product code	AJE-H4214P
Power [W]	42
Light source	HALOGEN BULB - Flame
Core	E14
Power supply [V]	230
Light stream [lm]	625
Colour temperature [K]	4000
Colour rendering index [Ra]	100
Lighting angle [°]	omnidirectional
Declared substitute [W]	60
Life [h]	1000
Energy consumption [kWh/1000h]	42
EAN	5901452155230
Net weight [g]	13
Bulk packaging	50
Declarations	CE, RoHS

### Dedication, specifications

- To be used in general and decorative lighting.

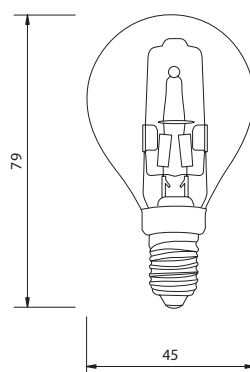

HALOGEN BULB  
**AJE-H4214G**




HALOGEN BULB  
**AJE-H4227G**

Halogen lamp has the option of regulating the light stream (work with the dimmer).


#### Dedication, specifications

- To be used in general and decorative lighting.

Product code	AJE-H4214G	AJE-H4227G
Power [W]	42	42
Light source	HALOGEN BULB - globe	
Core	E14	E27
Power supply [V]	230	230
Light stream [lm]	625	625
Colour temperature [K]	4000	4000
Colour rendering index [Ra]	100	100
Lighting angle [°]	omnidirectional	omnidirectional
Declared substitute [W]	60	60
Life [h]	1000	1000
Energy consumption [kWh/1000h]	42	42
EAN	5901452129040	5901452129057
Net weight [g]	14	18
Bulk packaging	50	50
Declarations	CE, RoHS	CE, RoHS

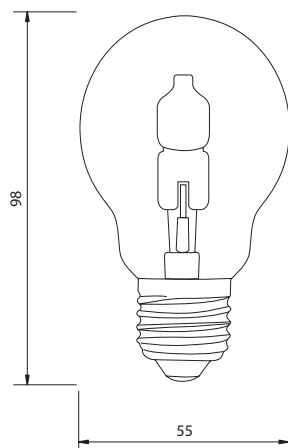

HALOGEN BULB  
**AJE-H4227B**

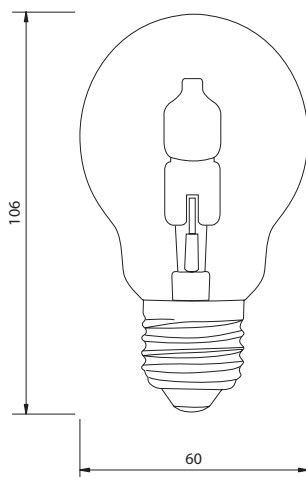

HALOGEN BULB  
**AJE-H7027B**

HALOGEN BULB  
**AJE-H10027B**


Halogen lamp has the option of regulating the light stream (work with the dimmer).

## Dedication, specifications

- To be used in general and decorative lighting.

Product code	AJE-H4227B	AJE-H7027B	AJE-H10027B
Power [W]	42	70	100
Light source	HALOGEN BULB - bulb		
Core	E27	E27	E27
Power supply [V]	230	230	230
Light stream [lm]	625	1180	1800
Colour temperature [K]	4000	4000	4000
Colour rendering index [Ra]	100	100	100
Lighting angle [°]	omnidirectional	omnidirectional	omnidirectional
Declared substitute [W]	60	100	130
Life [h]	1000	1000	1000
Energy consumption [kWh/1000h]	42	70	100
EAN	5901452128999	5901452129019	5901452155124
Net weight [g]	31	31	31
Bulk packaging	50	50	50
Declarations	CE, RoHS	CE, RoHS	CE, RoHS


3-band fluorescent lamp  
HERA  
**T5, 6W, 840**

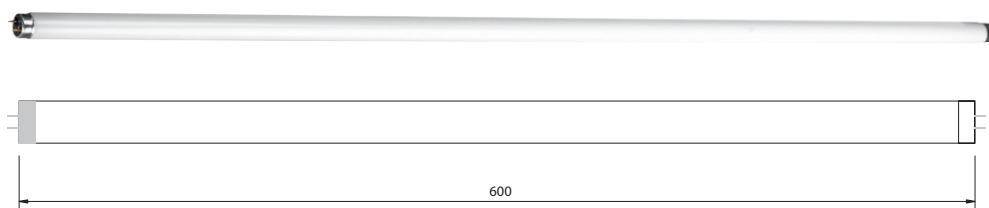

Product code	ACS-HER840T5-6
Power [W]	6
Light source	3-band linear fluorescent lamp
Core	G5
Power supply [V]	230
Colour temperature [K]	4000
Colour rendering index [Ra]	≥80
Lighting angle [°]	omnidirectional
Energy consumption [kWh/1000h]	6
EAN	5901443095187
Declarations	CE, RoHS

Dedication, specifications

- Option of using in decorative and technical fittings.

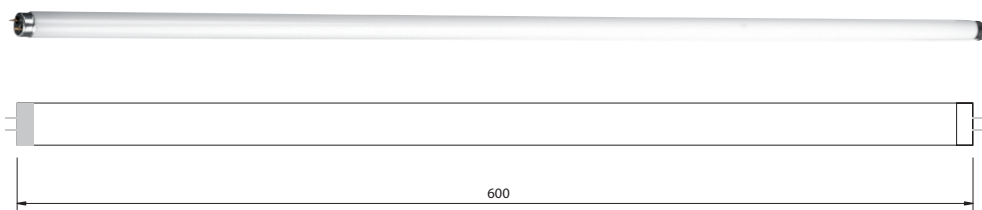

3-band fluorescent lamp  
HERA

**T8, 18W, 830**

3-band fluorescent lamp  
HERA

**T8, 18W, 840**


3-band fluorescent lamp  
HERA

**T8, 18W, 865**

## Dedication, specifications

- Option of using in decorative and technical fittings.

Product code	ACS-HER830T8-18	ACS-HER840T8-18	ACS-HER865T8-18
Power [W]	18	18	18
Light source	3-band linear fluorescent lamp		
Core	G13	G13	G13
Power supply [V]	230	230	230
Colour temperature [K]	3000	4000	6500
Colour rendering index [Ra]	≥80	≥80	≥80
Lighting angle [°]	omnidirectional	omnidirectional	omnidirectional
Energy consumption [kWh/1000h]	18	18	18
EAN	5901443015864	5901443015871	5901443015888
Declarations	CE, RoHS	CE, RoHS	CE, RoHS

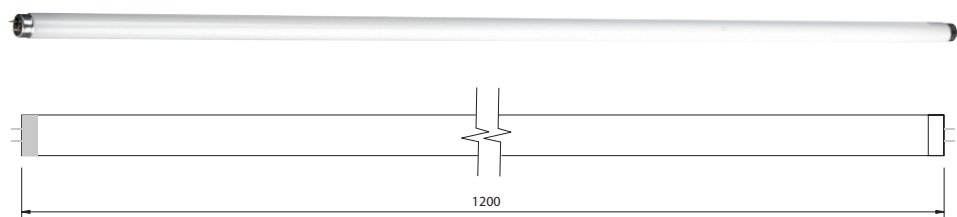

3-band fluorescent lamp  
HERA

**T8, 36W, 830**

3-band fluorescent lamp  
HERA

**T8, 36W, 840**

3-band fluorescent lamp  
HERA

**T8, 36W, 865**

#### Dedication, specifications

- Option of using in decorative and technical fittings.

Product code	ACS-HER830T8-36	ACS-HER840T8-36	ACS-HER865T8-36
Power [W]	36	36	36
Light source	3-band linear fluorescent lamp		
Core	G13	G13	G13
Power supply [V]	230	230	230
Colour temperature [K]	3000	4000	6500
Colour rendering index [Ra]	≥80	≥80	≥80
Lighting angle [°]	omnidirectional	omnidirectional	omnidirectional
Energy consumption [kWh/1000h]	36	36	36
EAN	5901443015895	5901443015901	5901443015918
Declarations	CE, RoHS	CE, RoHS	CE, RoHS





## TRUST BRAND PRODUCTS



UPS AJE-3000VA Rack

## UPS backup power supply



**Type** - Rack 19"  
**Real power** - 2400 W  
**Apparent power** - 3000 VA  
**Input voltage [V]** - 230 V  
**Input voltage [V]** - 0-300 V  
**Output voltage** - 230 V  
**Sine waveform** - Full sine wave  
**Topology** - Interactive line (VI)  
**Battery type** - 12V / 9Ah x 6 pcs.  
**Backup time (average)** - 5-20 min  
**Transfer time** - 4 ms  
**Operation indicators** - LCD display  
**Safety features** - autotest and protection against complete battery discharge, low/high voltage, overload protection

**Interface** - RS232, USB, SNMP (option)  
**Number of outlet sockets** - 6 pcs  
**Operating conditions** - Temperature 0- 40°C, humidity 0-90 % (without condensation)  
**Complied norms and certificates** - CE  
**Height in service cabinet** - 2U  
**Height** - 86 mm  
**Width** - 438 mm  
**Depth** - 630 mm  
**Weight** - 45 kg  
**Software** - Windows 95/98/NT/2000, Novell, Sun Solaris, IBM Aix, Compaq, True 64, UnixWare, HP-UX, FreeBSD, Unix and Mac



Reliability



Security



Trust





## Standalone power supply unit **AJE-100VA PT**

### Protection devices

- Surge
- overload
- telephone line protection RJ11
- autotest
- automatic fuse
- protection against complete discharging of the battery
- interference eliminator
- RFI/EMI varistor damper

Product code	AJE-100VA PT
Supply voltage [V]	230
Input voltage [V]	162-290
Active power [W]	100
Reactive power [VA]	200
Switching time [ms]	4
Voltage shape	Modulated sinusoid - approximate
Back-up time [min]	7-220
Topology	offline
Type / number of batteries	12 V / 7Ah x 1 unit, maintenance-free, tight, gel-lead
Interface	RJ11
Operation indicator / Display	Sound, LED diodes
Number and type of output sockets	2 pcs of Schucko sockets
Height/width/depth [mm]	228 / 82,5 / 207
Net weight [kg]	2,7
Declarations	CE, RoHS



## Standalone power supply unit **AJE-200VA PT**

### Protection devices

- Surge
- overload
- telephone line protection RJ11
- autotest
- automatic fuse
- protection against complete discharging of the battery
- interference eliminator
- RFI/EMI varistor damper

Product code	AJE-200VA PT
Supply voltage [V]	230
Input voltage [V]	162-290
Active power [W]	200
Reactive power [VA]	400
Switching time [ms]	4
Voltage shape	Modulated sinusoid - approximate
Back-up time [min]	17-270
Topology	offline
Type / number of batteries	12 V/ 9 Ah x 1 unit, maintenance-free, tight, gel-lead
Interface	RJ11
Operation indicator / Display	Sound, LED diodes
Number and type of output sockets	2 pcs of Schucko sockets
Height/width/depth [mm]	228 / 82,5 / 207
Net weight [kg]	3
Declarations	CE, RoHS



Standalone power supply unit  
**AJE-424VA**



#### Protection devices

- Surge
- overload
- telephone line protection RJ11
- autotest
- automatic fuse
- protection against complete discharging of the battery
- interference eliminator
- RFI/EMI varistor damper

Product code	AJE-424VA
Supply voltage [V]	230
Input voltage [V]	162-290
Active power [W]	240
Reactive power [VA]	425
Switching time [ms]	4
Voltage shape	Modulated sinusoid - approximate
Back-up time [min]	5 - 20
Topology	Line Interactive (VI)
Type / number of batteries	12V/5Ah x 1 unit, maintenance-free, tight, gel-lead
Interface	RJ11
Operation indicator / Display	Sound, LED diodes
Number and type of output sockets	2 pcs of Schuko sockets, built-in power supply cable
Height/width/depth [mm]	142/100/290
Net weight [kg]	4,25
Declarations	CE, RoHS


 Standalone power supply unit  
**AJE-500VA LED**

 Standalone power supply unit  
**AJE-700VA LED**


#### Protection devices

- surge
- overload
- telephone line protection RJ11
- autotest
- automatic fuse
- protection against complete discharging of the battery
- interference eliminator
- RFI/EMI varistor damper

Product code	AJE-500VA LED	AJE-700VA LED
Supply voltage [V]	230	230
Input voltage [V]	162-290	162-290
Active power [W]	340	480
Reactive power [VA]	500	700
Switching time [ms]	4	4
Voltage shape	Modulated sinusoid - approximate	
Back-up time [min]	5 - 20	5 - 20
Topology	Line Interactive (VI)	Line Interactive (VI)
Type / number of batteries	12V/7Ah x 1 pcs	12V/9Ah x 1 pcs
	maintenance-free, tight, gel-lead	
Interface	USB	USB
Operation indicator / Display	Sound, LED diodes	Sound, LED diodes
Number and type of output sockets	4 pcs of IEC sockets, power supply cable	
Height/width/depth [mm]	142/101/279	142/101/279
Net weight [kg]	4,2	4,9
Declarations	CE, RoHS	CE, RoHS





Standalone power supply unit  
**AJE-626VA**



#### Protection devices

- surge
- overload
- telephone line protection RJ11
- autotest
- automatic fuse
- protection against complete discharging of the battery
- interference eliminator
- RFI/EMI varistor damper

Product code	AJE-626VA
Supply voltage [V]	230
Input voltage [V]	162-290
Active power [W]	360
Reactive power [VA]	625
Switching time [ms]	4
Voltage shape	Modulated sinusoid - approximate
Back-up time [min]	5 - 20
Topology	Line Interactive (VI)
Type / number of batteries	12V/7Ah x 1 unit, maintenance-free, tight, gel-lead
Interface	USB, RJ11
Operation indicator / Display	Sound, LED diodes
Number and type of output sockets	2 pcs of Schuko sockets, built-in power supply cable
Height/width/depth [mm]	142/100/287
Net weight [kg]	4,25
Declarations	CE, RoHS





## Standalone power supply unit **AJE-EASY 650VA LCD**



### Protection devices

- surge
- overload
- telephone line protection RJ11
- autotest
- automatic fuse
- protection against complete discharging of the battery
- interference eliminator
- RFI/EMI varistor damper

Product code	AJE-EASY 650VA LCD
Supply voltage [V]	230
Input voltage [V]	162-290
Active power [W]	360
Reactive power [VA]	650
Switching time [ms]	4
Voltage shape	Modulated sinusoid - approximate
Back-up time [min]	5-20
Topology	Line Interactive (VI)
Type / number of batteries	12V/7Ah x 1 unit, maintenance-free, tight, gel-lead
Interface	USB
Operation indicator / Display	LCD display, Sound
Number and type of output sockets	2 pcs of Schuko sockets, built-in power supply cable
Height/width/depth [mm]	142/100/287
Net weight [kg]	4,2
Declarations	CE, RoHS



Standalone power supply unit  
**AJE-650LCD**



#### Protection devices

- surge
- overload
- telephone line protection RJ11
- autotest
- automatic fuse
- protection against complete discharging of the battery
- interference eliminator
- RFI/EMI varistor damper

Product code	AJE-650LCD
Supply voltage [V]	230
Input voltage [V]	162-290
Active power [W]	360
Reactive power [VA]	650
Switching time [ms]	4
Voltage shape	Modulated sinusoid - approximate
Back-up time [min]	5 - 20
Topology	Line Interactive (VI)
Type / number of batteries	12V/7Ah x 1 unit, maintenance-free, tight, gel-lead
Interface	USB, RS232, RJ11
Operation indicator / Display	LCD display, Sound
Number and type of output sockets	4 pcs of IEC sockets, built-in power supply cable
Height/width/depth [mm]	145/100/330
Net weight [kg]	5,2
Declarations	CE, RoHS



## Standalone power supply unit **AJE-EASY 850VA LCD**



### Protection devices

- surge
- overload
- telephone line protection RJ11
- autotest
- automatic fuse
- protection against complete discharging of the battery
- interference eliminator
- RFI/EMI varistor damper

Product code	AJE-EASY 850VA LCD
Supply voltage [V]	230
Input voltage [V]	162-290
Active power [W]	480
Reactive power [VA]	850
Switching time [ms]	4
Voltage shape	Modulated sinusoid - approximate
Back-up time [min]	5 - 20
Topology	Line Interactive (VI)
Type / number of batteries	12V/9Ah x 1 unit, maintenance-free, tight, gel-lead
Interface	USB
Operation indicator / Display	LCD display, Sound
Number and type of output sockets	2 pcs of Schuko sockets, built-in power supply cable
Height/width/depth [mm]	142/100/287
Net weight [kg]	4,9
Declarations	CE, RoHS



Standalone power supply unit  
**AJE-850LCD**



#### Protection devices

- surge
- overload
- telephone line protection RJ11
- autotest
- automatic fuse
- protection against complete discharging of the battery
- interference eliminator
- RFI/EMI varistor damper

Product code	AJE-850LCD
Supply voltage [V]	230
Input voltage [V]	162-290
Active power [W]	480
Reactive power [VA]	850
Switching time [ms]	4
Voltage shape	Modulated sinusoid - approximate
Back-up time [min]	5 - 20
Topology	Line Interactive (VI)
Type / number of batteries	12V/9Ah x 1 unit, maintenance-free, tight, gel-lead
Interface	USB, RS232, RJ11
Operation indicator / Display	LCD display, Sound
Number and type of output sockets	4 pcs of IEC sockets, built-in power supply cable
Height/width/depth [mm]	145/100/330
Net weight [kg]	6,2
Declarations	CE, RoHS



Standalone power supply unit  
**AJE-1000VA LED**



#### Protection devices

- surge
- overload
- telephone line protection RJ11
- autotest
- automatic fuse
- protection against complete discharging of the battery
- interference eliminator
- RFI/EMI varistor damper

Product code	AJE-1000VA LED
Supply voltage [V]	230
Input voltage [V]	162-290
Active power [W]	600
Reactive power [VA]	1000
Switching time [ms]	4
Voltage shape	Modulated sinusoid - approximate
Back-up time [min]	5-20 min
Topology	Line Interactive (VI)
Type / number of batteries	12V/7Ah x 2 unit, maintenance-free, tight, gel-lead
Interface	USB, RJ11
Operation indicator / Display	LCD display, Sound
Number and type of output sockets	4 pcs of IEC sockets, power supply cable
Height/width/depth [mm]	160/146/350
Net weight [kg]	8
Declarations	CE, RoHS



Standalone power supply unit  
**AJE-1021VA**



#### Protection devices

- surge
- overload
- telephone line protection RJ11
- autotest
- automatic fuse
- protection against complete discharging of the battery
- interference eliminator
- RFI/EMI varistor damper

Product code	AJE-1021VA
Supply voltage [V]	230
Input voltage [V]	162-290
Active power [W]	600
Reactive power [VA]	1100
Switching time [ms]	4
Voltage shape	Modulated sinusoid - approximate
Back-up time [min]	5-20
Topology	Line Interactive (VI)
Type / number of batteries	12V/7Ah x 2 unit, maintenance-free, tight, gel-lead
Interface	USB, RJ11
Operation indicator / Display	LCD display, Sound
Number and type of output sockets	2 pcs of Schuko sockets, built-in power supply cable
Height/width/depth [mm]	160/146/350
Net weight [kg]	8
Declarations	CE, RoHS





Standalone power supply unit  
**AJE-1200VA LCD**



#### Protection devices

- surge
- overload
- telephone line protection RJ11
- autotest
- automatic fuse
- protection against complete discharging of the battery
- interference eliminator
- RFI/EMI varistor damper

Product code	AJE-1200VA LCD
Supply voltage [V]	230
Input voltage [V]	158-290
Active power [W]	600
Reactive power [VA]	1200
Switching time [ms]	4
Voltage shape	Modulated sinusoid - approximate
Back-up time [min]	5 - 15
Topology	Line Interactive (VI)
Type / number of batteries	12V/7Ah x 2 unit, maintenance-free, tight, gel-lead
Interface	USB, RS232
Operation indicator / Display	LCD display, Sound
Number and type of output sockets	2 pcs of Schuko sockets, 2 pcs of IEC sockets, built-in power supply cable
Height/width/depth [mm]	160/146/350
Net weight [kg]	8,9
Declarations	CE, RoHS





Standalone power supply unit  
**AJE-1600VA LCD**



#### Protection devices

- surge
- overload
- telephone line protection RJ11
- autotest
- automatic fuse
- protection against complete discharging of the battery
- interference eliminator
- RFI/EMI varistor damper

Product code	AJE-1600VA LCD
Supply voltage [V]	230
Input voltage [V]	158-290
Active power [W]	900
Reactive power [VA]	1600
Switching time [ms]	4
Voltage shape	Modulated sinusoid - approximate
Back-up time [min]	6-18
Topology	Line Interactive (VI)
Type / number of batteries	12V/9Ah x 2 unit, maintenance-free, tight, gel-lead
Interface	USB, RS232
Operation indicator / Display	LCD display, Sound
Number and type of output sockets	2 pcs of Schucko sockets, 1 piece of Schucko anti-surge socket, 3 pcs of IEC sockets
Height/width/depth [mm]	205/146/397
Net weight [kg]	11
Declarations	CE, RoHS



Standalone power supply unit  
**AJE-2200VA LCD**



#### Protection devices

- surge
- overload
- telephone line protection RJ11
- autotest
- automatic fuse
- protection against complete discharging of the battery
- interference eliminator
- RFI/EMI varistor damper

Product code	AJE-2200VA LCD
Supply voltage [V]	230
Input voltage [V]	158-290
Active power [W]	1200
Reactive power [VA]	2200
Switching time [ms]	4
Voltage shape	Modulated sinusoid - approximate
Back-up time [min]	6-18
Topology	Line Interactive (VI)
Type / number of batteries	12V/9Ah x 2 unit, maintenance-free, tight, gel-lead
Interface	USB, RS232
Operation indicator / Display	LCD display, Sound
Number and type of output sockets	2 pcs of Schucko sockets, 1 piece of Schucko anti-surge socket, 3 pcs of IEC sockets
Height/width/depth [mm]	205/146/397
Net weight [kg]	11,5
Declarations	CE, RoHS



## Standalone power supply unit **AJE-550VA Sinus LCD**



### Protection devices

- surge
- overload
- telephone line protection RJ11
- autotest
- automatic fuse
- protection against complete discharging of the battery
- interference eliminator
- RFI/EMI varistor damper

Product code	AJE-550VA Sinus LCD
Supply voltage [V]	230
Input voltage [V]	162-290
Active power [W]	350
Reactive power [VA]	550
Switching time [ms]	4
Voltage shape	Full sinusoid
Back-up time [min]	5 - 20
Topology	Line Interactive (VI)
Type / number of batteries	12 V / 7Ah x 1 unit, maintenance-free, tight, gel-lead
Interface	USB, RJ11
Operation indicator / Display	LCD display, Sound
Number and type of output sockets	4 pcs of IEC sockets, built-in power supply cable
Height/width/depth [mm]	330 /100/145
Net weight [kg]	5
Declarations	CE, RoHS



## Standalone power supply unit **AJE-700VA Sinus LCD**



### Protection devices

- surge
- overload
- telephone line protection RJ11
- autotest
- automatic fuse
- protection against complete discharging of the battery
- interference eliminator
- RFI/EMI varistor damper

Product code	AJE-700VA Sinus LCD
Supply voltage [V]	230
Input voltage [V]	162-290
Active power [W]	420
Reactive power [VA]	700
Switching time [ms]	4
Voltage shape	Full sinusoid
Back-up time [min]	5 - 20
Topology	Line Interactive (VI)
Type / number of batteries	12 V / 9Ah x 1 unit, maintenance-free, tight, gel-lead
Interface	USB, RJ11
Operation indicator / Display	LCD display, Sound
Number and type of output sockets	4 pcs of IEC sockets, built-in power supply cable
Height/width/depth [mm]	330/100/140
Net weight [kg]	5,2
Declarations	CE, RoHS



## Standalone power supply unit **AJE-1500VA Sinus LCD**



### Protection devices

- surge
- overload
- telephone line protection RJ11
- autotest
- automatic fuse
- protection against complete discharging of the battery
- interference eliminator
- RFI/EMI varistor damper

Product code	AJE-1500VA Sinus LCD
Supply voltage [V]	230
Input voltage [V]	162-290
Active power [W]	1050
Reactive power [VA]	1500
Switching time [ms]	4
Voltage shape	Full sinusoid
Back-up time [min]	6-18
Topology	Line Interactive (VI)
Type / number of batteries	12 V / 9Ah x 2 unit, maintenance-free, tight, gel-lead
Interface	USB, RJ11
Operation indicator / Display	LCD display, Sound
Number and type of output sockets	6 pcs of IEC sockets, power supply
Height/width/depth [mm]	205/146/397
Net weight [kg]	12,2
Declarations	CE, RoHS



Power supply unit in installation  
RACK 19"

and as a standalone unit

**AJE-2000R 2kVA  
RACK**

#### Protection devices

- surge
- overload
- telephone line protection RJ11
- autotest
- automatic fuse
- protection against complete discharging of the battery
- interference eliminator
- RFI/EMI varistor damper

Product code	AJE-2000R 2kVA RACK
Supply voltage [V]	230
Input voltage [V]	1-300
Active power [W]	1600
Reactive power [VA]	2000
Switching time [ms]	4
Voltage shape	Full sinusoid
Back-up time [min]	5-20
Topology	Line Interactive (VI)
Type / number of batteries	12V / 9Ah x 4 unit, maintenance-free, tight, gel-lead
Interface	RS232, USB, SNMP (option)
Operation indicator / Display	LCD display, Sound
Number and type of output sockets	8 pcs of IEC sockets
Height/width/depth [mm]	2U (88/438/480)
Net weight [kg]	25
Declarations	CE, RoHS





Power supply unit in installation  
RACK 19"

and as a standalone unit

## AJE-3000R 3kVA RACK



### Protection devices


- surge
- overload
- telephone line protection RJ11
- autotest
- automatic fuse
- protection against complete discharging of the battery
- interference eliminator
- RFI/EMI varistor damper

Product code	AJE-3000R 3kVA RACK
Supply voltage [V]	230
Input voltage [V]	1-300
Active power [W]	2400
Reactive power [VA]	3000
Switching time [ms]	4
Voltage shape	Full sinusoid
Back-up time [min]	5-20
Topology	Line Interactive (VI)
Type / number of batteries	12V / 9Ah x 6 unit, maintenance-free, tight, gel-lead
Interface	RS232, USB, SNMP (option)
Operation indicator / Display	LCD display, Sound
Number and type of output sockets	6 pcs of IEC sockets, 2 big IEC anti-surge sockets
Height/width/depth [mm]	2U 88/438/600
Net weight [kg]	45
Declarations	CE, RoHS

---

ENJOY YOUR SHOPPING AND  
WE'RE LOOKING FORWARD TO DOING BUSINESS WITH YOU

Place for company stamp:

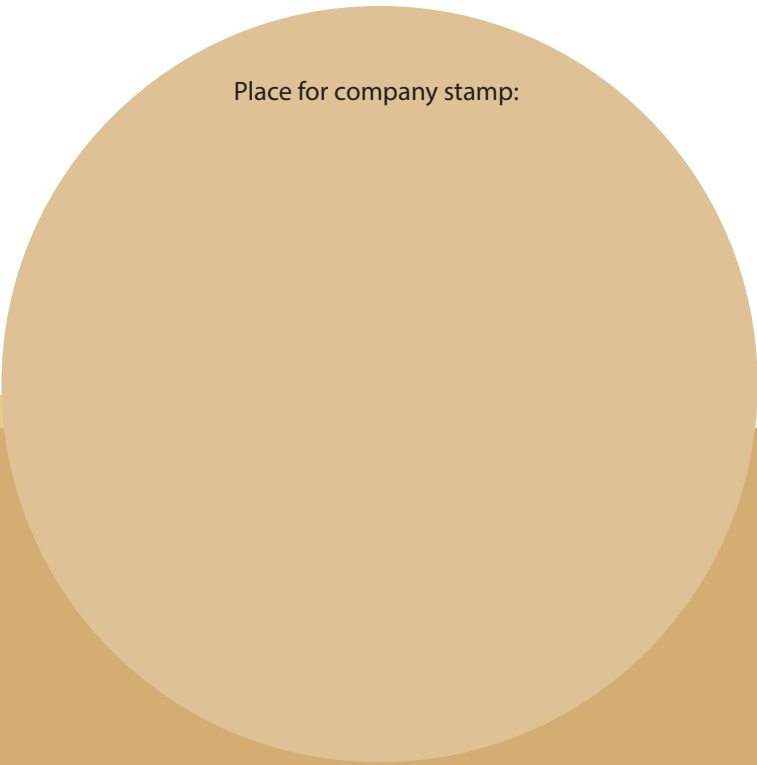

---